






15 Million Litres in Stock throughout All 13 Provinces and Territories

Heavy Duty Engine Oils	9
Automotive Engine Oils	15
Gear Lubricants	21
Transmission Fluids	27
Hydraulic Fluids	33
Industrial & Functional Fluids	41
Greases	47
Biodegradable Lubricants	53
FOOD-GRADE Lubricants	57
Antifreeze/Chemicals	59



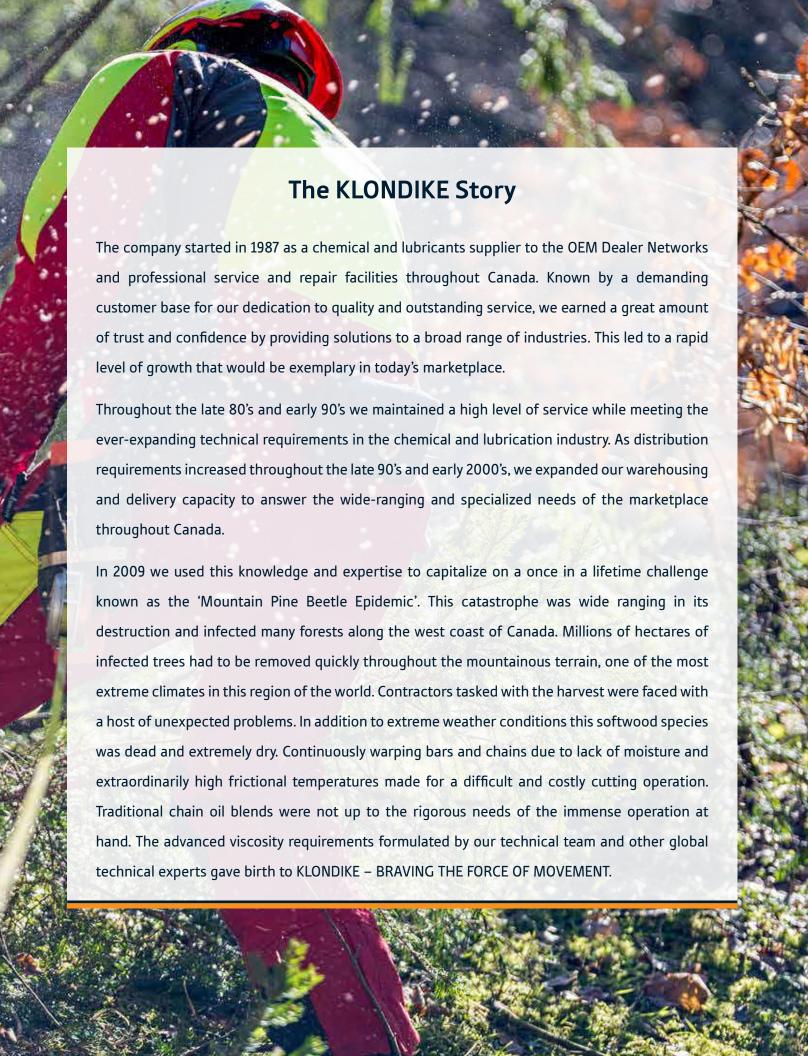

High Mileage Engine Oils

Optimize performance in engines with 120,000 kms or greater!

KLONDIKE Synthetic Blend High Mileage Engine Oils are designed to help extend engine life and provide enhanced protection and performance in engines with 120,000 kms or greater.

Premium engine oil with technologically advanced additive system.





SAE 5W-20 API SP/GF-6A High Mileage Synthetic Blend listed on page 16 SAE 5W-30 API SP/GF-6A High Mileage Synthetic Blend listed on page 16

FOOD-GRADE Lubricants

Lubricants designed specifically for use in food processing equipment.

KLONDIKE's FOOD-GRADE products are registered with NSF for use in the food and beverage industry and carry the H1 credentials for incidental food contact.

The NSF mark confirms that products meet all requirements and demonstrates KLONDIKE's commitment to quality, compliance, and safety.

A high-quality H1 lubricant minimizes the risk of contamination and ensures the longevity and performance of equipment.




Antifreeze/Coolant Range of Products! Concentrate and 50/50 Ready to Use

Find your match with KLONDIKE's comprehensive line up:

- Green Universal designed for automotive and heavy-duty diesel engines.
- Yellow Automotive OAT ELC extended life coolant designed for automotive and light duty trucks.
- Red Heavy Duty NOAT ELC extended life coolant designed for heavy duty diesel engines demanding extended performance.
- Gold All Engines NF OAT ELC highly advanced extended life coolant designed for All heavy and light duty engines regardless of year, make, model, or original antifreeze color.





















EASY ON YOUR WALLET. EASY ON YOUR BACK.

Save EHC fees with KI ONDIKE EZE-KEG.

KLONDIKE EZE-KEG is a new 52L have stilled a library for cost savings from EHC fees. Lighter than competitive halo constant a library is also easier to handle.

KLONDIKE EZE-KEG PRODUCTS	PART #
OW-20 C5 Euro Full Synthetic Engine Oil	KL-LD4084
OW-20 Euro Full Synthetic Engine Oil	KL-LD4284
• 5W-30 Euro Full Synthetic Low SAPS Engine Oil	KL-LD4684
• 5W-30 Euro Full Synthetic Mid SAPS Engine Oil	KL-LD4884
• 5W-40 Euro Full Synthetic Mid SAPS Engine Oil	KL-LD5284
ULV Full Synthetic ATF	KL-TF2684



KLONDIKE heavy duty engine oils are formulated to assist in maximizing engine life and minimizing wear. Our advanced processes and technologies enable KLONDIKE heavy duty motor oils to strike a balance between durability, emission control, optimized drain intervals, and improved efficiencies for your equipment.

KLONDIKE API CK-4 heavy duty engine oils are a direct successor and replacement for API CJ-4 fluid technology. API CK-4 fluids are fully backwards compatible and supersede CJ-4 and previous service categories. KLONDIKE API CK-4 fluids offer improvements in fuel efficiency, oxidation resistance, viscosity shear stability, and aeration control over the previous fluid technologies. KLONDIKE heavy duty oils have been approved by world's leading manufacturers*, including:














Heavy Duty Engine Oils











KL-HD0284









SAE 10W-30 CK-4 Commercial is a high performance mixed fleet engine oil; designed for use in

Price:







KL-HD0380



KL-HD0382



KL-HD0390

diesel engines specifying API CK-4 Service Category and SAE 10W-40.



KL-HD0395

SAE 10W-40 CK-4 Synthetic Blend is recommended for use in naturally aspirated and turbocharged

SAE 10W-30 CK-4 Synthetic Blend is OEM certified by Cummins, Detroit Diesel, Volvo, Mack, Ford, and Renault; and recommended for use in all engines specifying API CK-4 Service Category



Price:













KL-HD0495



Price:



SAE 15W-40 CK-4 Advanced Formula is OEM certified by Cummins, Detroit Diesel, Volvo, Mack, Ford, and Renault; and recommended for use in all engines specifying API CK-4 Service Category and SAE 15W-40.



KL-HD0540



KL-HD0560



KL-HD0575



KL-HD0580



KL-HD0582







C 2 6 4 &



Price:

Heavy Duty Engine Oils



SAE 15W-40 CK-4 Commercial is a mixed fleet engine oil recommended for naturally aspirated and turbocharged diesel and gasoline engines in which SAE 15W-40 viscosity grade and API CK-4









Price:



SAE 0W-30 CK-4 Full Synthetic is recommended for use in heavy duty engines specifying API Service Categories CK-4, CJ-4, Cl-4 PLUS, Cl-4, and SAE grade 0W-30.











Price:



Service Categories CK-4, CI-4 PLUS, CI-4, and SAE grade 0W-40. 5 OUART KL-HD2560









KL-HD2599

KL-HD2595

SAE 5W-40 CK-4 Full Synthetic is OEM certified by Detroit Diesel, Volvo, Mack, Ford, and Renault; and recommended for use in all engines specifying API CK-4 Service Category and SAE 5W-40.

SAE 0W-40 CK-4 Full Synthetic is recommended for use in heavy duty engines specifying API

Price:















KL-HD3090



KL-HD3095



Price:



SAE 15W-40 CK-4 Full Synthetic is recommended for use in heavy duty engines specifying API CK-4 Service Category and SAE 15W-40.









KL-HD3580 KL-HD3590

Price:

CHEMICALS ANTIFREEZE

Heavy Duty Engine Oils



SAE 10W-30 FA-4 Synthetic Blend is recommended for use in GHG-17 compliant engines where the use of FA-4 engine oils is specified.



KL-HD4260

KL-HD4280



KL-HD4290





Price:

SAE 10W CF Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel engines where SAE 10W monograde meeting API CF is specified.





KL-HD6080





KL-HD6099

Price:

SAE 30 CF-2 Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel engines where SAE 30 monograde meeting API CF-2 is specified.















KL-HD6340 KL-HD6380 KL-HD6360

KL-HD6390

KL-HD6395

KL-HD6399

Price:



SAE 40 CF-2 Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel engines where SAE 40 monograde meeting API CF-2 is specified.





KL-HD6660







KL-HD6695



Price:



SAE 50 CF-2 Heavy Duty Engine Oil is recommended for use in four-stroke gasoline and diesel engines where SAE 50 monograde meeting API CF-2 is specified.



KL-HD6880



KL-HD6890





KL-HD6895

KL-HD6899

Price:

12

Heavy Duty Engine Oils



or naturally aspirated engines running on natural gas and requiring low ash engine oil.

KL-HD7080







KL-HD7095

KL-HD7099

Price:

SAE 10W-40 Low Ash Natural Gas Synthetic Blend is recommended for modern naturally aspirated and turbocharged four-stroke engines running on natural gas.

SAE 40 Low Ash Natural Gas is specifically designed for use in medium and high speed (rpm)

SAE 15W-40 Low Ash Natural Gas is recommended for use in heavy duty on-road turbo-charged



3.78 L JUG



KL-HD7250

KL-HD7295

KL-HD7299

Price:

SAE 40

engines fueled by pipeline natural gas.



KL-HD7490 KL-HD7495

KL-HD7499

Price:





SAE 40 Low Ash Sour Natural Gas is recommended for heavy duty stationary turbo-charged or naturally aspirated, stoichiometric or lean burn engines running on landfill or organic/bio gas and requiring low ash engine oil.

SAE 40 Mid Ash Sour Natural Gas is recommended for use in medium and high speed (rpm)









KL-HD7680

KL-HD7690

KL-HD7695

KL-HD7699

Price:

SAE 40

gas engines fueled by processed or pipeline natural gas or other gas sources that may contain

corrosive materials. **DRUM**



KL-HD7890 Price:

KL-HD7895

KL-HD7899

Heavy Duty Engine Oils



SAE 20W-40 Railroad Engine Oil is an advanced ashless formulation for large diesel engines in railroad, marine, and power generation applications. Designed for use in heavy duty diesel engines





KL-HD8290

KL-HD8295

KL-HD8299



SAE 40 Railroad Engine Oil is an advanced ashless formulation for large diesel engines in railroad, marine, and power generation applications. Designed for use in heavy duty diesel engines specifying SAE 40 monograde zinc-free engine oil.







DRUM KL-HD8490

KL-HD8495

KL-HD8499

Price:

KLONDIKE advanced technology automotive engine oils are formulated for optimum efficiency and are designed for use in modern, highly fuel efficient engines that are subject to increasing levels of stress such as stop-and-go city driving, frequent short trips, extreme high and low operating temperatures, extended idling and towing. KLONDIKE synthetic blend and full synthetic motor oils for passenger cars offer superior oxidation stability, extra protection against heavy load conditions, additional high temperature protection, and better cold weather properties than conventional motor oils. Additionally, KLONDIKE premium quality automotive engine oils are formulated under the newest technology and are certified under the latest ILSAC API SN PLUS and API SP GF-6 specifications. This technology is also good for use in the prior ILSAC GF-5 or API SM specifications.










Automotive Engine Oils









SAE 5W-20 API SP/GF-6A Commercial is recommended for passenger cars and light trucks requiring API SP/ ILSAC GF-6 certified oils, or engine oils from previous service categories.



KL-LD0090





Price:



SAE 5W-30 API SP/GF-6A Commercial is recommended for passenger cars and light trucks requiring API SP/ ILSAC GF-6 certified oils, or engine oils from previous service categories.



KL-LD0290



KL-LD0295




Price:

SAE 10W-30 API SP/GF-6A Commercial is recommended for passenger cars and light trucks requiring API SP/ ILSAC GF-6 certified oils, or engine oils from previous service categories.









KL-LD0490

KL-LD0495

KL-LD0499

Price:



SAE 10W-40 API SP uses a specialized formula for older, high mileage engines. Recommended for use in passenger cars, light trucks, sport utility vehicles, and other stationary or mobile engines.







KL-LD0599

Price:

Automotive Engine Oils



SAE 20W-50 API SP uses a specialized formula for older, high mileage engines. Recommended for

use in passenger cars, light trucks, sport utility vehicles, and other stationary or mobile engines.



Price:

KL-LD0640

KL-LD0690

KL-LD0699

stationary or mobile engines specifying SAE 5W-20 grade and API SP/GF-6A Service Category.









KL-LD1082



KL-LD1084

SAE 5W-20 API SP/GF-6A Synthetic Blend is recommended for use in automobiles and other



KL-LD1090

KL-LD1095



Price:



SAE 5W-20 API SP/GF-6A High Mileage Synthetic Blend is designed to help extend engine life and provide enhanced protection and performance in engines with 120,000 kms or greater.



KL-LD1160



KL-LD1190



KL-LD1199



Price:

SAE 5W-30 API SP/GF-6A Synthetic Blend is recommended for use in automobiles and other stationary or mobile engines specifying SAE 5W-30 grade and API SP/GF-6A Service Category.























Price:

KL-LD1240

KL-LD1260

KL-LD1280

EZE-BOX KL-LD1282

EZE-KEG KL-LD1284

DRUM KL-LD1290

KL-LD1295

KL-LD1299



HIGH MILEAGE SAE 5W-30 API SP/GF-6A High Mileage Synthetic Blend is designed to help extend engine life and provide enhanced protection and performance in engines with 120,000 kms or greater. KL-LD1360 Price:



5 QUART





KL-LD1390

KL-LD1399

16

CHEMICALS ANTIFREEZE

Automotive Engine Oils



automobiles and other stationary or mobile engines specifying SAE 10W-30 grade and API SP / GF-6A Service Category. KL-LD1440





KL-LD1460



KL-LD1480









KL-LD1482

DRUM KL-LD1490

SAE 10W-30 API SP/GF-6A Synthetic Blend Synthetic Blend is recommended for use in

KL-LD1495

KL-LD1499

Price:

SAE 0W-16 API SP/GF-6B Full Synthetic is a highly advanced, 100% synthetic engine oil formulation engineered to provide exceptional resistance and recommended for use in stationary or mobile engine specifying SAE OW-16 grade and API SP /GF-6B.







KL-LD2840

KL-LD2890 KL-LD2899

Price:







KL-LD3060



KL-LD3082



KL-LD3084

use in stationary or mobile engine specifying SAE 0W-20 grade and API SP /GF-6A.



KL-LD3090

SAE 5W-20 API SP/GF-6A Full Synthetic is recommended for use in stationary or mobile engine

SAE 0W-20 API SP/GF-6A dexos1° Full Synthetic is GM dexos1° certified and recommended for



KL-LD3095



Price:











specifying SAE 5W-20 grade and API SP /GF-6A.









KL-LD3240 KL-LD3260 KL-LD3282


KL-LD3284

KL-LD3290

KL-LD3295

KL-LD3299

Price:













KL-LD3482









KL-LD3490

KL-LD3495 KL-LD3499

Price:



Automotive Engine Oils



Price:







KL-LD4084



KL-LD4090

















EZE-KEG KL-LD4284











Price:



KL-LD4240





5 L BOTTLE KL-LD4660



while offering high stability and very long service interval.

EZE-KEG KL-LD4684



DRUM KL-LD4690



SAE 0W-20 C5 Full Synthetic is specially formulated to meet the requirements of ACEA C5. Robust technology meets the demanding specifications of European OEM's including the resistance of

SAE OW-20 Euro Full Synthetic is recommended for use in European gasoline and diese

SAE 5W-30 Euro Low SAPS Full Synthetic is recommended for use in European gasoline ar

fueled engines. Specially formulated to exceed demanding OEM requirements for fuel economy,

engines. Specially formulated to exceed demanding OEM requirements for fuel economy, wnile

KL-LD4695













11 BOTTLF KL-LD4840



5 L BOTTLE KL-LD4860



KL-LD4884



SAE 5W-30 Euro Mid SAPS Full Synthetic is an extended service life, premium enqine

specialty base oils and additives. Designed for use in European gasoline and diesel fueled engines.

DRUM KL-LD4890

SAE 5W-40 SN/CF Euro Full Synthetic is recommended for use in modern European 4, 6 cylinder multi-cam, multi-valve, naturally aspirated, super- and turbo-charged engines.



KL-LD4895



KL-LD4699

KL-LD4899













KL-LD5082



Price:



Automotive Engine Oils



Price:



KL-LD5240

















fueled engines. 1 L BOTTLE







SAE 5W-40 Euro Mid SAPS Full Synthetic is a very high-performance engine oil that resists oxidation, sludge deposits, and viscosity loss. Designed for use in European gasoline and diesel



W	EUROPEA





Tough operating conditions are no match for KLONDIKE **gear** oils. They are specially formulated for maximum protection, durability, and efficiency no matter what climate or conditions are prevalent. Only the finest technology available is used in manufacturing our premium synthetic gear lubricants. KLONDIKE robust formulations are designed for gears and differentials that place rigorous demands on fluid technology and require extreme temperature and pressure protection. Driveline components in today's automotive and heavy duty vehicles have become increasingly stressed by increased engine output, higher operating temperatures, and extended service intervals. KLONDIKE's advanced gear oil technology protects against severe wear while balancing fluid durability in heavy load conditions, including extended drain intervals when applicable.









lubrication where API GL-5 performance is required.

KL-GL0880



KL-GL0890



KL-GL0895

Price:













SAE 80W-90 GL-5 is designed for differentials, manual transmissions, power take off units, and

SAE 80W-90 GL-5 Commercial is designed for use in hypoid differentials, gear boxes, and axle





Price:

SAE 85W-140 GL-5 is designed for differentials, manual transmissions, power take off units, and final drives specifying SAE 85W-140 and API GL-5/MT-1.









KL-GL1390

KL-GL1060





KL-GL1395

KL-GL1399

Price:



specifying SAE 75W-90 and API GL-5/MT-1 including limited slip.









SAE 75W-90 GL-5 Full Synthetic is recommended for use in heavy duty gear applications



KL-GL2099

QUART KL-GL2040

KL-GL2080

KL-GL2085

KL-GL2090

KL-GL2095

Price:



Price:

SAE 75W-140 GL-5 Full Synthetic is recommended for use in heavy duty gear applications











KL-GL2495





ISO 68 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 68 is specified.







PAIL

KL-GL3680

KL-GL3695

KL-GL3699

Price:

ISO 100 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 100 is specified.









KL-GL3899

KL-GL3880

KL-GL3890

KL-GL3895

Price:

ISO 150 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 150 is specified.













PAIL KL-GL4080

KL-GL4090

KL-GL4095

KL-GL4099



ISO 220 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 220 is specified.









KL-GL4299

KL-GL4280

KL-GL4290

KL-GL4295

Price:









KL-GL4490



Price:

ISO 460 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on

ISO 320 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on







KL-GL4680





drives of all sizes where ISO 460 is specified.



KL-GL4695

KL-GL4699

Price:

ISO 150 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 150 is specified.











KL-GL6080

KL-GL6090

KL-GL6095 KL-GL6099

Price:

ISO 220 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 220 is specified.

ISO 320 EP Full Synthetic is formulated for industrial bearings and gear applications operating in













KL-GL6280

DRUM KL-GL6290

KL-GL6295

BULK KL-GL6299

Price:













KL-GL6480

KL-GL6490

KL-GL6495 KL-GL6499

Price:



ISO 460 EP Full Synthetic is formulated for industrial bearings and gear applications operating in









KL-GL6690 KL-GL6680

KL-GL6695

Price:

ISO 680 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 680 is specified.















KL-GL6890

KL-GL6895

KL-GL6899

Price:

25

KLONDIKE transmission fluids are formulated for use in a full range of automatic transmissions and provide premium shifting characteristics. This extensive line of automatic transmission fluids offers smooth yet responsive shifting, long service life, and outstanding fuel efficiency. KLONDIKE transmission oils are engineered to provide improved performance, extended transmission life, as well as premium flow characteristics at very low temperatures and protection against oxidation, varnish and sludge at high temperatures.

Transmission Fluids









Ford vehicles, and other import brands, where such a fluid is specified.

KL-TF0880







TYPE-F Automatic Transmission Fluid is a non-friction modified fluid designed for use in older

Price:



ATF MD3 is designed and recommended for use in most pre-2006 automatic transmissions that reference specifications GM DEXRON III, Ford MERCON and similar. KL-TF1040 Price:











KL-TF1095



Synchromesh SAE 75W-80 GL-4 Full Synthetic Manual Transmission Fluid is specifically developed for manual transmissions and transfer cases in passenger cars and trucks, engineered to exceed OEM standards for smooth, precise shifting and advanced antiwear protection.



Price:



1 L BOTTLE KL-TF1640



ULV Full Synthetic Automatic Transmission Fluid is designed for use in automatic transr manufactured by North American, European, Asian, and other manufactures around th using 9 and 10 speed high performance transmission designs.





KL-TF2640





Price:

KL-TF2684 KL-TF2690

GREASES

Transmission Fluids



ATF Universal Full Synthetic is one highly advanced and truly universal automatic transmission fluid ideal for global application. Meets the performance requirements of (but not limited to):

- ATF Type A-Suffix A
- Aisin Warner AW-1, JWS 3309, 3314, 3317, 3324, SCS, M315 A-1, T-IV
- Acura ATF-Z1 (VTM-4)
- Allison C-3, C-4, TES-389
- American Motors ATF+3(MS7176-E), ATF+4(MS9602)
- Audi ZF 5HP (18FL, 19FL, 24A, 30), 6HP (1375.4), TL52162 (LT71141), G-052-025-A2, G-052-162-A1/A2, G-052-182-A2, G-052-990-A2
- BMW ZF 5HP (18FL, 19FL, 24A, 30), 6HP (1375.4), LA2634, ETL-7045E, ETL-8072B, N402, LT71141 83.22.9.400 (272, 275), 83.22.9.407 (738, 765, 807, 858, 859), 83.22.0.397 (114), 83.22.0.403 (248, 249)
- Caterpillar Power Shift TO-2
- Chrysler AS68RC "T-IV", AS69RC, ATF+3 (MS7176-E), ATF+4 (MS9602), ZF 8HP, ZF 9HP
- Daewoo LT 71141
- Fiat "all vehicles", Type T-IV
- Ford Mercon®
 - > Mercon (XT-2-QDR,XT-2-QSM syn)
 - > Mercon V (XT-5-QM, XT-5-DM, WSS-M2C-202B)
 - > Mercon SP (XT-6-QSP, XT-6-DSP, WSS-M2C-919D

except 6HP26 / 6R60 / 6R75 transmissions

- > Mercon LV (XT-10-QLV, WSS-M2C-938A)
- > WSS-M2C33-A/B/C/D/F/G, WSS-M2C138-CJ, WSSM2C166-H, 185-A, 195-A, 202-B, WSS-M2C 922-A1, 924-A (XT-8-QAW)
- GM Dexron[®]
 - > Dexron VI, III-H, III-G, II-E, II

 - > GM Transfer Fluid 12378515 (Transynd® applications)
 - > GM Transfer Case 12378396, 12378508 (Auto Trak II)
- Honda ATF-Z1, VTM-4, DW-1, DPF
- Hyundai SP-II, SP-III, SP-IV, SP-4M, WS-9638
- Infiniti Matic-D, Matic-J, Matic-K, Matic-S
- IDEMITSU K17, JATCO 3100 PL085
- Isuzu Besco ATF-II, ATF-III
- Jaquar ZF 5HP24, ZF 6HP26, LT71141, JLM20238, JLM21044, ATF 3403 M115, M1375.4
- JASO M315-2004 1A, 2A
- Jeep ATF+3, ATF+4, AS68RC (T-IV)
- Kia SP-II, SP-III, SP-IV, SP-4M, ATF Red 1

- Lexus Type T, T-II, T-III, T-IV, WS (JWS 3324)
- MAN 339 A,F, V1, V2, Z1, Z2, Z3
- Mazda ATF-M III, ATF M-3, ATF-MV, V (XT-9-QMM5, FNR 5), FZ
- MERCEDES ZF 4HP20, 223.2, 236.1, 236.10, 236.11, 236.12(NAG 1/2), 236.14, 236.41, 236.5(C-4), 236.6, 236.7, 236.8, 236.9, 722.3, 722.4, 722.5, 722.6, 722.9
- Mini Cooper T-IV, 83 22 0 402 413, 83 22 7 542
- Mitsubishi Diamond SP-II, SP III, SP IV, Dia Queen J2, J3
- Nissan Matic-D, Matic-J, Matic-K, Matic-S, 402
- Porsche ZF 5HP19FL, ZF 5HP20, LT71141, ATF 3403-M115, T-VI, JWS 3309
- Renault "all vehicles"
- RENK DOROMAT
- SAAB JWS 3309, 93 165 146/147
- SATURN T-IV, GM TASA, T-IV ATF, GM WS ATF
- Shell 3403, 3353, LA2634, ATF-134, M-1375.4, M-1375.5, M-1375.6, M-12108
- Subaru ATF, AT-HP
- Suzuki ATF 2326, 2384K, JWS 3309, 3314
- Texaco ETL-7045E, ETL-8072B, N402
- Toyota Type T, T-II, T-III, T-IV, Type D-2, WS (JWS) 3324), Toyota Prius (WS)
- VICKERS M-2950-S, I-286-S
- **VOITH** G607 (55.6335.XX), G1363 (55.66336.XX), TURBO, ZF, ECOMAT, ZF TE-ML 02F, 03D, 04D, 05L, 09, 11B, 14A/B/C, 16L, 17C
- Volvo 97340, 97341, 97342 (AT-102), 1161640, 1161540, 1161521, T-IV
- Volkswagen ZF 5HP (18FL, 19FL, 24A, 30), 6HP (1375.4), TL 52162 (LT71141), TL 52533, G-055-025-A2, G-052 162-A1/A2, G-052-182-A2, G-052-990-A2, G-052-025-A2, G-055-540-A2
- **ZF** 8HP, 9HP



KL-TF3060









KL-TF3090



KL-TF3095



KL-TF3099

Price:

CHEMICALS ANTIFREEZE

Transmission Fluids

Price:







Approvals:



MERCON® LV



CVT Fluid Full Synthetic is formulated for belt and chain driven continuously variable transmissions. Do not use as a replacement for ATF.

DEXRON®-VI / MERCON® LV ATF Full Synthetic is OEM certified by General Motors and Ford.

- Audi/VW (TL 52180; G 052 180; G 052 516)
- BMW 8322 0 136 376/8322 0 429 154 (EZL799/799A)
- Daihatsu Amix CVTF-DC, CVTF-DFE
- Dodge / Jeep (NS-2 / CVTF+4/Mopar CVT 4)
- Ford CFT30/WSS-M2C933-A /Motorcraft XT-7-QCFT
- GM/Saturn (DEX-CVT, CVTF I-Green2)
- Honda (HMMF, HCF-2)
- Hyundai/Kia CVTF (SP-CVT-J1)
- Mazda CVTF 3320
- Mercedes Benz CVT28, 236.20
- Mini Cooper (EZL 799/ EZL 799A/ZF CVT V1)
- Mitsubishi DiaQueen (CVTF-J1, CVTF-J4)
- Nissan (NS-1, NS-2, NS-3)
- Punch EZL 799/EZL 799A
- Renault ELFMATIC
- Shell Green 1V
- Subaru (NS-2 / Lineartronic CVTF, i-CVTF, K0425Y0710) e-CVTF, High Torque
- Suzuki (TC / NS-2 / CVTF Green 1, Green 2, CVTF 3320)
- Toyota (CVTF TC, CVTF FE)







KL-TF3340


KL-TF3390

KL-TF3399

Price:

Transmission Fluids











KL-TF3190

KL-TF3195

KL-TF3199

Price:



Dual Clutch Full Synthetic Transmission Fluid is designed for dual clutch transmissions in passenger cars, specially engineered to deliver outstanding anti-shudder durability, shear stability, and oxidation control even when exposed to severe conditions.



1 L BOTTLE KL-TF3540



Price:











KL-TF3999

Price:

SAE 50 Manual Transmission Full Synthetic is recommended for use in all applications specifying SAE grade 50 and API Service Category MT-1.



KL-TF4080



KL-TF4085



KL-TF4090



KL-TF4095

BULK KL-TF4099

SAE 10W TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and stationary equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 10W grade are specified.

Price:











KL-TF6095

KL-TF6099

Price:

KL-TF6080

Transmission Fluids









KL-TF6299

equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 30 grade are specified.

SAE 30 TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and stationary

SAE 50 TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and stationary

Price:





KL-TF6280





KL-TF6499

All Season Synthetic Blend TDTO-4 is for all season use across a wide T° range in heavy duty mobile and stationary equipment where Caterpillar TO-4, TO-4M, or Allison C-4 fluids are specified.





KL-TF7080



KL-TF7090



KL-TF7095

KL-TF7099

Price:





Arctic Full Synthetic TDTO-4 with Arctic Performance Technology is designed for ultra-low To use in heavy duty equipment where Caterpillar TO-4 or Allison C-4 fluids are specified.







KL-TF7280



KL-TF7290

KL-TF7490



KL-TF7299

Price:

DRUM






KL-TF7480 Price:

KLONDIKE anti-wear hydraulic fluids are designed to operate in the most extreme conditions. Today, operating conditions require greater precision and pressure than ever before. While advanced systems do more work and are more responsive, they are also more vulnerable to wear and deposit formation when operated at higher temperatures and pressures. Highly tested KLONDIKE hydraulic lubricants are specially formulated with the finest base oils and additive systems that deliver unrivaled performance and protection.

Hydraulic Fluids









AW 22 Commercial Hydraulic Fluid is recommended for in use heavy duty mobile and stationary equipment in exploration, construction, logging and mining industries.









KL-HF0080 KL-HF0090

KL-HF0095 KL-HF0099

Price:









KL-HF0284







KL-HD0295

KL-HF0299

AW 46 Commercial Hydraulic Fluid is recommended for in use heavy duty mobile and stationary

Price:



equipment in exploration, construction, logging and mining industries.







KL-HF0290





KL-HF0480

KL-HF0484

DRUM KL-HF0490

KL-HF0495

KL-HF0499

AW 68 Commercial Hydraulic Fluid is recommended for in use heavy duty mobile and stationary

Price:



equipment in exploration, construction, logging and mining industries.









KL-HF0680 KL-HF0690

KL-HF0695

KL-HF0699


Price:

Hydraulic Fluids



AW 22 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic

systems in all types of heavy duty and industrial service applications ensuring outstanding system





KL-HF1099

Price:

KL-HF1080

KL-HF1090

KL-HF1095











Price:

AW 32 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic systems in all types of heavy duty and industrial service applications ensuring outstanding system efficiency and extended service life.

Red AW 22 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service specifying ISO 22 viscosity. Dyed in red for better visibility.













Red AW 32 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in



Price:

5 QUART

KL-HF1260

KL-HF1275

KL-HF1280

KL-HF1290

KL-HF1295

KL-HF1299



heavy duty and industrial service specifying ISO 32 viscosity. Dyed in red for better visibility.

KL-HF1380







KL-HF1390

KL-HF1395

KL-HF1399

Price:



efficiency and extended service life. **5 QUART**



KL-HF1480







AW 46 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic systems in all types of heavy duty and industrial service applications ensuring outstanding system

KL-HF1490 KL-HF1495

Price:



KL-HF1460

Hydraulic Fluids











AW 68 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic

systems in all types of heavy duty and industrial service applications ensuring outstanding system

Price:

KL-HF1680 KL-HF1690

KL-HF1695

KL-HF1699

AW 100 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic systems in all types of heavy duty and industrial service applications ensuring outstanding system efficiency and extended service life.








KL-HF1890




KL-HF1899

KL-HF1880

Price:



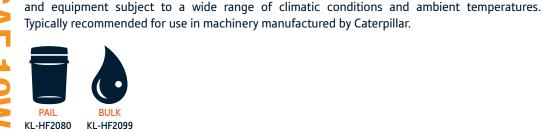



KL-HF2080 KL-HF2099

Price:

Multi-Viscosity AW 15 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment operating in ultra-low temperatures.

Multi-Viscosity AW 22 with Arctic Performance Technology is formulated for high performance

hydraulic systems in mobile and stationary equipment across a broad temperature range.













KL-HF4880 KL-HF4890

KL-HF4895

BULK KL-HF4899

Price:









PAIL **DRUM** KL-HF5080 KL-HF5090

KL-HF5095

KL-HF5099

Price:







KL-HF5299

Multi-Viscosity AW 46 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment across a broad temperature range.

Multi-Viscosity AW 36 with Arctic Performance Technology is formulated for high performance

hydraulic systems in mobile and stationary equipment across a broad temperature range.



KL-HF5280







KL-HF5480

KL-HF5490

KL-HF5495

Price:

Multi-Viscosity AW 68 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment across a broad temperature range.

Long Life Turbine Oil ISO 32 is designed for use in non-geared steam, hydro-electric and gas

Long Life Turbine Oil ISO 46 is designed for use in non-geared steam, hydro-electric and gas









DRUM KL-HF5690

KL-HF5695

KL-HF5699

Price:













KL-HF6680

KL-HF6690

KL-HF6695

KL-HF6699

Price:











turbines as well as a high temperature bearing lubricant and coolant.

DRUM KL-HF6890

KL-HF6895

BULK

Price:



KL-HF6880



KL-HF6899



turbines as well as a high temperature bearing lubricant and coolant.

KL-HF7080 KL-HF7090



KL-HF7095

Long Life Turbine Oil ISO 68 is designed for use in non-geared steam, hydro-electric and gas

Long Life Turbine Oil ISO 150 is designed for use in non-geared steam, hydro-electric and gas

KL-HF7099

turbines as well as a high temperature bearing lubricant and coolant.

Price:









Price:

Universal Tractor Fluid is the one single fluid that may be used to lubricate all conventional points on an agricultural or industrial tractor or piece of mobile equipment with a common sump.











9.46 L JUG KL-HF8075



KL-HF8084



Arctic Tractor Fluid Synthetic Blend is designed to fulfill the torque transfer, hydraulic, and power

Universal Tractor Fluid Full Synthetic is formulated with Arctic Performance Technology for use

KL-HF8095

KL-HF8099

Price:









transmission requirements of farm tractors and other mobile off-road equipment.

Price:

KL-HF8180

KL-HF8190

KL-HF8195

KL-HF8199

in all kinds of farm equipment, off-highway machinery, and industrial tractors.









Price:

KL-HF8299









Universal Red Tractor Fluid is a specialized, advanced formulation designed to fulfill the torque

transfer, hydraulic, and power transmission requirements of modern agricultural and other mobile

KL-HF8495

KL-HF8499

Price:



Wet Brake Lubricant Full Synthetic is a specialized heavy duty fluid designed to fulfil VOLVO

wet brake WB101 and WB102. KL-HF8680



KL-HF8699

Price:

ISO 32 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.







KL-HF8795

KL-HF8799

Price:

ISO 220 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.





KL-HF9280

KL-HF9299



Price:

ISO 460 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.





KL-HF9495

KL-HF9499

Price:



CIRCULATING 680

ISO 680 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.





Price:

KL-HF9690 KL

		ı
		ı
		ı
		L
		ı
		ı
		ı
		ı
		ŀ
		ı
		ı
		ı
		ı
		ŀ
		ı
		ı
		ı
		ı
		ŀ
LUBE-LINK	FIND THE RIGHT OIL FOR YOUR APPLICATION lubelink.ca	

The KLONDIKE family of industrial and functional fluids is formulated for exceptional performance and reliability using world-class technologies that have been trusted and proven by industry professionals for many years and is relied on by industry users all year round. Our bar and chain oil is of the highest quality and operates in extreme climatic - high or low temperature - conditions. It offers unsurpassed durability and performance for equipment operating in high heat conditions, and performs flawlessly in the logging and saw mill industries that require the most robust and durable lubricant formulations in order to maximize efficiency and productivity.

CHEMICALS ANTIFREEZE

= Conventional



= Synthetic Blend



= Full Synthetic

Industrial Oils





KL-100650



KL-I00680



KL-100690



Bar & Chain Oil is designed for the lubrication of chains, bars, and sprockets of chain saws.

Hi-Tack ISO 90 Bar & Chain Oil is a low viscosity formula for winter use in all types of chain saws

Hi-Tack ISO 150 Bar & Chain Oil is a medium viscosity formula for all-season use in all types of

Hi-Tack ISO 220 Bar & Chain Oil is formulated for summer use in chain saws, open bearings, gears,

chain saws with manual or automatic oilers for lubrication of the bar, chain, and sprocket.

KL-100695









KL-I01060



KL-I01080



DRUM KL-I01090



with manual or automatic oilers for lubrication of the bar, chain, and sprocket.

KL-I01095





Price:



5 QUART KL-I01260



PAIL KL-I01280



DRUM KL-I01290



TOTE KL-I01295

Price:

and chains found in industrial applications or anywhere a tacky oil is required.

KL-I01460



KL-I01480



DRUM



KL-I01490

KL-IO1495

Industrial Oils









KL-102280 KL-102290

KL-102295

KL-102299

Price:

ISO 68

Rock Drill Oil ISO 68 is formulated for the internal mechanisms and moving parts of pneumatic drilling equipment operating in heavy duty service environments where ISO 68 is specified.





KL-102680

KL-I02690

KL-102695

KL-102699

Price:



KL-102880



KL-I02890



KL-I02895



KL-102899

Price:

Rock Drill Oil ISO 150 is formulated for the internal mechanisms and moving parts of pneumatic drilling equipment operating in heavy duty service environments where ISO 150 is specified.

Rock Drill Oil ISO 220 is formulated for the internal mechanisms and moving parts of pneumatic









PAIL KL-103080

KL-103090

KL-103095

KL-103099

Price:



drilling equipment operating in heavy duty service environments where ISO 220 is specified.

DRUM

KL-I03290



KL-I03295



PAIL KL-103280

Price:

42

CHEMICALS

Industrial Oils



duty pipeline compressors pumping hydrocarbons such as natural gas.

DRUM



KL-104490 KL-I04495

KL-104499

Price:

ISO 46

ISO 46 Natural Gas Compressor Oil Full Synthetic is designed for use in rotary screw, rotary vane, reciprocating, and centrifugal air compressors and vacuum pumps requiring ISO 46 synthetic lubricant.

ISO 260 Natural Gas Compressor Oil is specifically designed for the lubrication of large, heavy



Price:



KL-I05180









KL-I05840 KL-I05880



KL-I05890

applications where non-detergent oil is specified.





Non-Detergent 30 Lubricating Oil is recommended for use in air compressors and other industrial

KL-I05895

KL-105899

Price:

Universal 2-Cycle is a premium low ash formula that promotes internal engine cleanliness and prolongs spark plug life in outdoor power equipment such as chain saws, trimmers, blowers and other machinery.






236 mL BOTTLE KL-106029

473 mL BOTTLE KL-I06032









KL-106040





DRUM KL-106090

Industrial Oils







OUART KL-I06240

KL-106260

Price:

ISO 68

ISO 68 Way Oil is specifically formulated for use in the lubrication of bearings, slides, and ways of machine tools such as lathes, planers, shapers, and tapping machines.

2-Cycle Full Synthetic Snowmobile Engine Oil is a premium lubricant formulated for use in modern snowmobiles (Arctic-Cat, Polaris, Yamaha, Ski-Doo), motorcycles, scooters, ATV's, and







KL-I07280

KL-I07290

Soluble Cutting Oil is a water-soluble cutting fluid designed for long service life and low maintenance; and suitable for use on a wide range of materials and machining operations.



KL-107880



KL-I07890



KL-107895

KL-107899

Price:

ISO 100

Tacky Saw Guide Oil ISO 100 is recommended for all types of thin kerf saw blades on modern gang saws and edgers.



DRUM KL-108390

Price:

ISO 150

KL-108590

Price:

Tacky Saw Guide Oil ISO 150 is recommended for all types of thin kerf saw blades on modern gang saws and edgers.




Industrial Oils



Multi-Use Industrial Cattle Oil is suitable for use in a wide range of applications such as cattle oiling systems, dust control in riding arenas, dust control in fertilizer plants, cedar shake preservative, concrete form release agent, and other similar industrial uses.

KL-109580

Price:









Price:

Light Form Release and Dust Suppressant Oil is a multi-purpose fluid designed as a wetting and release agent for concrete forms as well as an effective commercial dust suppressant liquid.

Dust Suppressant/Form Oil is colorless, odorless, neutral oil for dust suppression and concrete







Price:





KL-109990

KL-109995

KL-109999

Price:




KLONDIKE produces a range of unique robust and tacky **greases** that provide premium lubrication in difficult operating conditions and are tailored to industry requirements for improved productivity. They are specially engineered for environments with extreme temperature requirement, moisture and dirt contamination, heavy loads, extended maintenance intervals and other conditions that impact performance. Our greases are created with the finest base oils and additives in order to provide outstanding tackiness, lubrication and protection. These formulations will guard against oxidation and wear in extreme pressure and high temperature applications.

Greases

CHEMICALS

FOOD-GRADE ANTIFREEZE

= Conventional







demanding industrial, automotive, and heavy duty equipment applications. Supports a 45% reduction in equipment downtime.






nKL-GR1630 nKL-GR1680

nKL-GR1685















TUBE PAIL nKL-GR4630 nKL-GR4680 nKL-GR4685







KLONDIKE nano Calcium Sulfonate EP-2 Grease is formulated with calcium sulfonate and proprietary nanotechnology. Recommended for industrial, automotive, and heavy duty equipment applications.

KLONDIKE nano Full Synthetic EP-1.5 Grease is formulated for use in the most technical and







TUBF nKL-GR4830

nKL-GR4880 nKL-GR4885

ENGINEERED **NANOTECHNOLOGY**

Price:



Multipurpose Red Grease is recommended for greasing applications of plain bearings, rolling elements, antifriction bearings, bushings and pins.



Price:

Greases



bearings operating at high speed, and where ultra-low To limits the mobility of heavier grease.



KL-GR0880

KL-GR0885

KL-GR0890

Price:



Syn Tac EP-00 Synthetic Grease is an extreme pressure, multi-purpose, semi-fluid lithium complex formulation fortified with PAO synthetic base oil, polymers, anti-wear agents, tackiness additives, and rust and oxidation inhibitors.

Ultra Tac EP-0 Synthetic Blend is designed for heavy duty use in industrial, on- and off-road vehicle, and heavy equipment applications operating in extreme cold T° where NLGI 0 is specified.

Ultra Tac EP-00 Synthetic Blend is recommended for pressurized auto grease systems, industrial



KL-GR0985









KL-GR1030







Price:



Ultra Tac EP-1 Synthetic Blend is designed for heavy duty use in industrial, on- and off-road vehicle, and heavy equipment applications operating in extreme cold To where NLGI 1 is specified.





TUBE

KL-GR1430



KL-GR1480



KL-GR1485



DRUM KL-GR1490

Price:



Ultra Tac EP-2 is designed for extreme duty use in a wide variety of industrial, on- and off-road vehicle, and heavy equipment applications where NLGI 2 is specified. NLGI GC-LB certified.











NLGI


GC-LB

NLGI

GC-LB

KL-GR1890

Price:





KL-GR1830

NATIONAL LUBRICANT GREASE INSTITUTE NLG

GC-LB

CHEMICALS ANTIFREEZE

Greases



MOLY

Moly Tac Arctic HD Synthetic Blend Grease is designed for high lubricating performance in extremely cold environments.



KL-GR2285

Price:



MOLY

Moly Tac EP-1 is formulated with 3% molybdenum disulfide for use in heavy duty, shock loaded bearings and bushings in industrial or off-highway equipment where NLGI 1 is required.

Moly Tac EP-2 is formulated with 3% molybdenum disulfide for use in heavy duty, shock loaded

bearings and bushings in industrial or off-highway equipment where NLGI 2 is required. NLGI GC-





KL-GR2430

KL-GR2485

Price:

MOLY



TUBE



KL-GR2880

KL-GR2885 KL-GR2890

KL-GR2830

Price:

MOLY









KL-GR8890

Price:

Open Gear Grease is engineered to protect extremely heavy loaded, slow moving, large open gear sets operating in severely challenging environments.









KL-GR9080

KL-GR9085

Price:

50

Greases



gear sets when used with spray type application system.

KL-GR9280

KL-GR9285

Price:

HD Hammer Grease is a specially designed extreme pressure grease paste for use in hydraulic hammers and impact tools. Calcium Sulfonate Complex fortified with copper and graphite lubricating solids form a durable protective film on contact and sliding surfaces for reduced galling, seizure, and wear.

Open Gear Lubricant is specially formulated to protect heavily loaded, slow moving, large open



KL-GR9630

Price:





Price:

Drill Rod Grease is designed to lubricate and protect long sections of drill rod and pipe operating in extreme conditions underground.



KL-GR9880



The KLONDIKE family of biodegradable lubricants are designed as an environmentally safer alternative to traditional industrial lubricants. With the rise in natural resource based industries being encouraged to monitor the impact and sustainability of the work completed in environmentally sensitive areas, the need for more environmentally safe and efficient products has increased. Our line of biodegradable lubricants are formulated using non-toxic chemistry with no heavy metals to contaminate water or soil, which will greatly reduce the immediate and longterm impact of the fluids on the environment in the event of an oil leak or spill. The KLONDIKE line of biodegradable lubricants are highly stable for smooth operational efficiency, and highly resistant to oxidation and deposit formation for long service life, while providing a high level of environmental conservation and protection.

CHEMICALS ANTIFREEZE

= Conventional







ENVIRO AW 22 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or qear-type hydraulic pumps in heavy duty and industrial service where ISO 22 viscosity is specified.





KL-BL0180

KL-BL0190

KL-BL0195

Price:

ENVIRO AW 32 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 32 viscosity is specified.

ENVIRO AW 46 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic,

ENVIRO AW 68 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 68 viscosity is specified.









PAIL KL-BL0280

KL-BL0290

KL-BL0295

Price:

environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or qear-type hydraulic pumps in heavy duty and industrial service where ISO 46 viscosity is specified.



Price:

PAIL KL-BL0380

DRUM KL-BL0390 KL-BL0395









KL-BL0480

DRUM KL-BL0490

KL-BL0495

Price:

Biodegradable Lubricants





KL-BL1080

KL-BL1090

KL-BL1095

stationary equipment where ISO 32 viscosity is specified.

ENVIRO MV 32 Anti-Wear Hydraulic Fluid is a zinc free, inherently biodegradable, environmentally friendly, long life hydraulic fluid designed for high performance applications in mobile and

BIO AW 32 Readily Biodegradable Hydraulic Fluid is a non-toxic, ashless fluid designed for high

BIO AW 46 Readily Biodegradable Hydraulic Fluid is a non-toxic, ashless fluid designed for high

BIO AW 46 Synthetic Blend Hydraulic Fluid is a readily biodegradable, non-toxic, high performance hydraulic oil designed for maximum performance and system protection in industrial and mobile

Price:

ENVIRO MV 46 Anti-Wear Hydraulic Fluid is a zinc free, inherently biodegradable, environmentally friendly, long life hydraulic fluid designed for high performance applications in mobile and stationary equipment where ISO 46 viscosity is specified.





KL-BL1180


KL-BL1190

KL-BL1195

Price:













PAIL

KL-BL1880

KL-BL1890

KL-BL1895

Price:















PAIL KL-BL1980

KL-BL1990

KL-BL1995

Price:



hydraulic equipment.





KL-BL2780

KL-B2790

KL-BL2795

Price:

Biodegradable Lubricants



BIO HEES AW 46 Fire Resistant Full Synthetic Hydraulic Oil is designed for maximum performance and system protection in industrial and mobile hydraulic equipment.

BIO Rock Drill Oil ISO 150 is a readily biodegradable, extreme pressure lubricant designed for the performance and protection of heavy duty pneumatic tools such as rock drills, breakers,





KL-BL3380

KL-BL3390

Price:



BIO Rock Drill Oil ISO 100 is a readily biodegradable, extreme pressure lubricant designed for the performance and protection of heavy duty pneumatic tools such as rock drills, breakers, jackhammers, and drifters as well as other surface and down-hole equipment.







PAIL KL-BL4380


KL-BL4390

KL-BL4395

Price:











KL-BL4480

KL-BL4490

KL-BL4495

Price:



KLONDIKE FOOD-GRADE AW Hydraulic Fluids and EP-2 Grease are designed specifically for use in food processing equipment. These high-quality food grade fluids and greases provide maximum food safety and provide excellent protection against wear, ensuring long service life in the most demanding operating conditions.

FOOD-GRADE Lubricants









FOOD-GRADE AW 32 Hydraulic Fluid is NSF H1 registered for incidental food contact. Recommended for industrial and mobile hydraulic equipment used in food processing equipment.





KL-FG2280

KL-FG2290

Price:

FOOD-GRADE AW 46 Hydraulic Fluid is NSF H1 registered for incidental food contact. Recommended for industrial and mobile hydraulic equipment used in food processing equipment.







DRUM

Price:

KL-FG2480


KL-FG2490



FOOD-GRADE EP-2 Grease is a specially formulated NSF H1 registered product for use in production facilities where incidental food contact may occur.



Price:



KLONDIKE Rust Blast is a professional strength, fast acting, penetrating lubricant. Powerful penetrating action blasts through rust and corrosion to loosen and lubricate stuck parts.

KLONDIKE Grease Blast is a truly versatile and certified biodegradable all-in-one degreaser. Simply alter the dilutions and it becomes a muscled water based engine degreaser, white wall tire cleaner, vinyl top cleaner, leather, plastic and vinyl cleaner, and a concrete floor degreaser.

KLONDIKE Brake Blast is an advanced formulation of highly technical solvents that once applied will quickly dissolve and remove grease, oil, brake fluid, road grime, and dirt. This non-chlorinated, low odor formula dries fast, leaves no residue, and is safe for use on most materials including plastics.

Antifreeze/Chemicals









DOT 3 Synthetic Brake Fluid is used in disc, drum, ABS brake systems, and hydraulic clutches of motor vehicles requiring DOT 3 fluid.





500 mL BOTTLE KL-CH1034

1 L BOTTLE KL-CH1040

Price:

DOT 4 High Performance Synthetic Brake Fluid is used in disc, drum, ABS brake systems, and hydraulic clutches of motor vehicles requiring DOT 4 fluid.







500 mL BOTTLE KL-CH1234

KL-CH1240

Price:

Universal DOT 5.1 Synthetic Brake Fluid is used in disc, drum, ABS brake systems, and hydraulic clutches of motor vehicles requiring Universal DOT 5.1 fluid.









500 mL BOTTLE KL-CH1434

KL-CH1440

Price:

Power Steering Fluid is used as a top off or complete replacement fluid for most domestic and import vehicles using mineral base oil with rack and pinion design.







Price:



Antifreeze/Chemicals

Price:

Powerful penetrating action blasts through rust and corrosion to loosen and lubricate stuck parts.

AEROSOL

KL-CH4030

Grease Blast Cleaner/Degreaser is a versatile, non-flammable, power-packed, highly effective degreaser for professional use. Certified biodegradable.

Rust Blast Penetrating Lubricant is a professional strength, fast acting, penetrating lubricant.









KL-CH6550



KL-CH6580

KL-CH6590

KL-CH6540

Price:

Brake Blast Brake Parts Cleaner is a non-chlorinated solvent designed to remove contaminants from brake parts quickly and easily. Surfaces dry residue free for improved, smooth brake performance.









AEROSOL KL-CH8630

KL-CH8680

DRUM KL-CH8690

Price:

Green Universal Antifreeze - Concentrate is a low silicate, multi-purpose coolant, designed for automotive engines and heavy-duty diesel engines where low silicate formula with the addition of SCA's is preferred.

Green Universal Antifreeze - 50/50 Ready to Use is a low silicate, multi-purpose coolant,











KL-CH8850

DRUM KL-CH8890

KL-CH8895

Price:



designed for automotive engines and heavy-duty diesel engines where low silicate formula with the addition of SCA's is preferred.







KL-CH8950

DRUM KL-CH8990

KL-CH8995

Price:

50/50

Antifreeze/Chemicals



Yellow Automotive OAT ELC Antifreeze - Concentrate is an advanced, multi-purpose, extended life coolant designed for automotive and light duty truck engine applications requiring OAT based extended life coolant.





E CONCENTRATE

KL-CH9050 KL-CH9090

KL-CH9095

Price:

YELLOW AUTOMOTIVE OAT



Yellow Automotive OAT ELC Antifreeze - 50/50 Ready to Use is an advanced, multi-purpose, extended life coolant designed for automotive and light duty truck engine applications requiring OAT based extended life coolant.







3.78 L JUG KL-CH9150

KL-CH9190

KL-CH9195

Price:



Red Heavy Duty NOAT ELC Antifreeze - Concentrate is an advanced, multipurpose, extended life coolant primarily designed for use in heavy duty diesel engines demanding extended life performance.







3.78 L JUG KL-CH9250

KL-CH9290

KL-CH9295

Price:



Red Heavy Duty NOAT ELC Antifreeze - 50/50 Ready to Use is an advanced, multipurpose, extended life coolant primarily designed for use in heavy duty diesel engines demanding extended life performance.



KL-CH9350





DRUM KL-CH9390

KL-CH9395

Price:



Gold All Engines NF OAT ELC Antifreeze - Concentrate is a highly advanced, multi-purpose, extended life coolant designed for All heavy and light duty engine applications regardless of year, make, model, or original antifreeze color.







3.78 L IUG KL-CH9450

KL-CH9490 KL-CH9495

Price:

62

Antifreeze/Chemicals



GOLD ALL ENGINES NF OAT ELC 50/50

Gold All Engines NF OAT ELC Antifreeze - 50/50 Ready to Use is a highly advanced, multi-purpose, extended life coolant designed for All heavy and light duty engine applications regardless of year, make, model, or original antifreeze color.







3.78 L JUG KL-CH9550

DRUM KL-CH9590

KL-CH9595

Price:

PARTS WASHER SOLVENT

Price:

Parts Washer Solvent is a high quality, general purpose solvent intended for use as a p washing solution. Low odor and is safe to use on most materials including plastic.





KL-CH8580

Warranty

KLONDIKE Lubricants Corporation Warranty

KLONDIKE Lubricants Corporation warrants that at the time of sale, all lubricant, grease, and engine coolant products bearing the KLONDIKE brand meet their written product specifications and are free of defective materials, design, and workmanship.

The KLONDIKE warranty is in addition to, and does not invalidate, any warranty supplied by an original equipment manufacturer when used in accordance with the KLONDIKE written product recommendations and the original equipment manufacturers' written specifications**.

KLONDIKE is 100% committed to our customers. To support this commitment, KLONDIKE Lubricants Corporation will repair or replace equipment parts that have been damaged as a direct result of the failure of any of our products**.

**For specific warranty details and procedures, contact KLONDIKE Lubricants Corporation at info@klondikelubricants.com.

^{*} TRADEMARKS DISCLAIMER: All OEM product names and trademarks are the property of their respective owners, which are in no way associated or affiliated with KLONDIKE Lubricants Corporation.



Comparison Chart

KLONDIKE Cross-Reference Table

KLONDIKE®	Shell	Chevron	Petro Canada	Esso/ Mobil	Conoco-Phillips	Castrol	Total
AW Hydraulic Fluid	TELLUS S2 M	RANDO HD	HYDREX AW	NUTO H, DTE 20	HYDRAULIC AW, POWERFLOW AW, MEGAFLOW AW	HYSPIN AWS, PARADENE AW	TOTAL AW, AZOLLA ZS
Multi-Viscosity Hydraulic Fluid	TELLUS S2 V	RANDO HDX	HYDREX MV	UNIVIS HVI	POWERFLOW HE	HYSPIN HVI, DUAL RANGE HV	HYDRAGRI, EQUIVIS ZS
15W-40 CK-4 Engine Oil	ROTELLA T4	DELO 400 SDE	DURON HP, SHP	DELVAC SUPER, DELVAC ELITE	GUARDOL ECT, FLEET SUPREME EC	VECTON, CRB MULTI	RUBIA OPTIMA
0W-30/0W- 40/5W-40 CK-4 Full Synthetic Oil	ROTELLA T6	DELO 400 SYNTHETIC LE	DURON UHP	DELVAC 1 ESP	TRITON ECT, TRITON ARCTIC	N/A	RUBIA OPTIMA 1500
80W-90 GL-5 Gear Oil	SPIRAX S4	DELO GEAR, DELO GEAR ESI	TRAXON	MOBILUBE HD, ESSO GEAR GX	MP GEAR LUBE	AP GEAR OIL	DYNATRANS HD
75W-90/75W-140 Full Synthetic Gear Oils	SPIRAX S6 AXME	DELO GEAR HD, XDM	TRAXON -E SYNTHETIC	DELVAC 1 SYNTHETIC GEAR	SYNGEAR SS, SYNGEAR FE, SYNGEAR LDO	SYNGEAR	XRD FE, SYN NA
Universal Tractor Fluid	SPIRAX S4 TXM	TRACTOR FLUID 1000 THF	DURATRAN	HYDRAUL 56, MOBIL 424	POWERTRAN, POWERTRAN XP	UTF	DYNATRANS MP
TO-4 Drivetrain	SPIRAX S4 CX	DELO TORQFORCE	PRODURO	MOBILTRANS HD	POWERDRIVE FLUID	TRANS-C	DYNATRANS AC
EP-0, EP-1 & EP-2 Grease	GADUS S2 V220, S3 V220	ULTRA DUTY EP, ULTI PLEX EP, DELO GREASE	PRECISION, VULTREX	DELVAC XTREME, MOBILUX, UNIREX	MULTIPLEX, DYNALIFE	PYROPLEX BLUE, PYROPLOEX RED	MULTIS EP
Bar & Chain Oil ISO 90/150/220	CHAIN OIL	RED CHAIN BAR OIL	DURATAC	HD CHAIN OIL	SPECIAL BAR AND CHAIN	N/A	BAR & CHAIN
ENVIRO AW	TELLUS S3 M	CLARITY AW	ENVIRON AW	N/A	POWERFLOW NZ	HYSPIN ZZ	AZOLLA AF
ENVIRO MV	N/A	N/A	ENVIRON MV	DTE 10 EXCEL	POWERFLOW NZ HE	N/A	N/A
BIO AW 32, 46	N/A	N/A	N/A	N/A	N/A	BIO HE AW	N/A
BIO Rock Drill 100, 150	N/A	N/A	N/A	N/A	N/A	ECOTERRA ROCK DRILL	N/A

Industry Applications



AGRICULTURE

KLONDIKE agriculture fluids are formulated to ensure maximum productivity in a critically time sensitive seasonal industry. Proper lubrication goes beyond protection, and our lubricants are created with premium base oils and inhibitors to disperse soot and reduce sludge. The KLONDIKE engine oils provide durability and reliability, and consistent performance during the long, demanding hours of the harvest season.



AUTOMOTIVE

The KLONDIKE product lines of automotive engine oils and automatic transmission fluids employ advanced formulations to meet and exceed the world's leading automakers requirements. Our cutting-edge synthetic blend and full synthetic formulas are engineered to provide maximum protection and optimum performance in all driving conditions. Certified by GM's dexos1°, GM's DEXRON°-VI, Ford's MERCON° LV.



CONSTRUCTION & EXPLORATION

Understanding the rigorous challenges and the nohassle requirements placed on construction and exploration equipment, KLONDIKE has engineered robust lubricants for environments with moisture and dirt contamination, heavy loads, extended maintenance intervals and other harsh conditions. The KLONDIKE Arctic Performance Technology line ensures maximum protection with smooth and reliable performance in extreme cold weather conditions.



FORESTRY

With relentless work schedules, environmental challenges, competitive pricing and harsh climatic conditions faced by the forestry industry, we are continually enhancing the KLONDIKE range of oils and lubricants to ensure harvesting, transportation and wood-production is as efficient and cost effective as possible. Our line of tough greases is blended for maximum lubrication and adhesion with minimum flyoff, making them ideal for milling operations.

Industry Applications



INDUSTRIAL

KLONDIKE has a vast range of premium industrial lubricants from conventional hydraulic fluids through to premium environmentally friendly oils. We provide solutions that increase uptime, productivity, and efficiency. The KLONDIKE lubricants can be utilized to extend maintenance intervals and prolong the life of your equipment. Our technical professionals will identify your needs and provide solutions for faster production and greater cost efficiency.



MARINE

The KLONDIKE range of high quality marine oils is tailored for reliability, stringent safety standards and strict environmental requirements as specified by marine authorities. Engineered for durability and maximum protection, whether it is salt or fresh water, these hardworking lubricants will ensure that your marine vessels or pleasure craft run smoothly and efficiently. Certified by the National Marine Manufacturers Association - NMMA®.



MINING

We offer a complete selection of oils and lubricants tailored to the requirements of all types of mining operations from equipment to process lubrication. The KLONDIKE line of heavy duty engine oils will deliver optimum efficiency and performance to every application and specification found in the wide range of machinery used in mining. From surface to underground mining our oils and greases are formulated to deliver outstanding equipment protection.



ON-ROAD HEAVY DUTY

Our heavy duty engine oils are formulated to protect your investment in your equipment and maximize the life of your engine. KLONDIKE heavy duty engine oils provide high performance in extreme temperatures, heavy-load requirements and challenging terrain. They are designed to meet the difficult challenge of effectively balancing durability, extended drain intervals, and emission control. Certified by Cummins, Detroit Diesel, Volvo, Mack, Ford and Renault.

KLONDIKE Distribution Facilities

Dedicated to meeting the delivery needs of our customers, we have warehousing and distribution centres that are strategically located throughout Canada to cater to the time-sensitive nature of your industry.

BRITISH COLUMBIA

Serving BC

101-1005 Derwent Way 3078-275th Street
Delta, BC V3M 5R4 Langley, BC V4W 3L4

ALBERTA

Serving Northern BC, AB, SK, YT and NT 4819 – 90 A Ave

Edmonton, AB T6B 2Y3

MANITOBA

Serving MB, Northwestern ON and NU

1510 Wall Street NW Winnipeg, MB R3G 2T3

ONTARIO

Serving ON and QC

370 Henry Street Brantford ON N3S 7W2

NEW BRUNSWICK

Serving the Atlantic Provinces

350 English Dr Moncton, NB E1E 3Y9



Spring/Summer 2022

KLONDIKE Lubricants Corporation

1-877-293-4691 • info@klondikelubricants.com • www.klondikelubricants.com

